

### Is Now Part of



# ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at <a href="https://www.onsemi.com">www.onsemi.com</a>

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, emplo



February 2013


# KA78L05AI 3-Terminal 0.1 A 5 V Positive Voltage Regulator

#### **Features**

- · Maximum Output Current of 100 mA
- · Output Voltage of 5 V
- Thermal Overload Protection
- · Short-Circuit Current Limiting
- Output Voltage Offered in ±5% Tolerance

### **Description**

The KA78L05AI of fixed-voltage monolithic integrated circuit voltage regulators are suitable for applications that required supply current up to 100 mA.



### **Ordering Information**

<b>Product Number</b>	Package	Packing Method	<b>Output Voltage Tolerance</b>	<b>Operating Temperature</b>		
KA78L05AIDTF	8-SOIC	Tape and Reel	±5%	-40 to +125°C		
KA78L05AIMTF	SOT-89	Tape and Reel	±3 /0	-40 to +125 C		

1

### **Block Diagram**

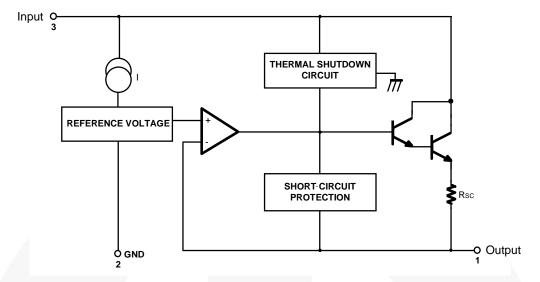


Figure 1. Block Diagram

### Absolute Maximum Ratings(1)

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only. Values are at  $T_A = 25^{\circ}\text{C}$  unless otherwise noted.

Symbol	Parameter		Value	Unit
V <sub>I</sub>	Input Voltage		30	V
TJ	Maximum Operating Junction Temperature			°C
T <sub>OPR</sub>	Operating Temperature Range	-40 to +125	°C	
T <sub>STG</sub>	Storage Temperature Range	-65 to +150	°C	
$R_{ heta JA}$	Thermal Resistance Junction-Air	SOT-89	225	°C/W
	Thema resistance Junction-All	8-SOIC	160	°C/W

#### Note:

Absolute Maximum Ratings indicate limits beyond which damage to the device may occur.
 Electrical specifications do not apply when operating the device outside of its stated operating conditions.

### **Electrical Characteristics**

 $V_I = 10 \text{ V, } I_O = 40 \text{ mA, } -40^{\circ}C \leq T_J \leq 125^{\circ}C, \ C_I = 0.33 \ \mu\text{F, } C_O = 0.1 \ \mu\text{F, unless otherwise specified.}$ 

Symbol	Parameter		Conditions		Min.	Тур.	Max.	Unit
Vo	Output Voltage		T <sub>J</sub> = 25°C		4.8	5.0	5.2	V
ΔV <sub>O</sub> Line Regulation <sup>(2)</sup>		$7 \text{ V} \le \text{V}_1 \le 20 \text{ V}$		8	150	mV		
			$T_J = 25^{\circ}C$	8 V ≤ V <sub>I</sub> ≤ 20 V		6	100	mV
41/	ΔV <sub>O</sub> Load Regulation <sup>(2)</sup>		T 25°C	1 mA $\leq$ I <sub>O</sub> $\leq$ 100 mA		11	60	mV
$\Delta V_{O}$ Load Regulation <sup>(2)</sup>			$T_J = 25^{\circ}C$	1 mA $\leq$ I <sub>O</sub> $\leq$ 40 mA		5.0	30.0	mV
V <sub>O</sub> Output Voltage		7 V ≤V <sub>I</sub> ≤ 20 V	1 mA $\leq$ I <sub>O</sub> $\leq$ 40 mA	4.75		5.25	V	
			$7 \text{ V} \leq \text{V}_{\text{I}} \leq \text{V}_{\text{MAX}}^{(3)}$	1 mA ≤ I <sub>O</sub> ≤ 70 mA	4.75		5.25	V
IQ	Quiescent Current		T <sub>J</sub> = 25°C			2.0	5.5	mA
$\Delta I_{Q}$	Quiescent Current	With Line	8 V ≤V <sub>I</sub> ≤ 20 V				1.5	mA
$\Delta I_{Q}$	∆l <sub>Q</sub> Change	With Load	$1 \text{ mA} \le I_{O} \le 40 \text{ mA}$	\(4)			0.5	mA
V <sub>N</sub>	Output Noise Voltage <sup>(4)</sup>		T <sub>A</sub> = 25°C, 10 Hz	≤ f ≤ 100 kHz		40		μV/Vo
$\Delta V_O/\Delta T$	Temperature Coefficient of V <sub>O</sub> <sup>(4)</sup>		$I_O = 5 \text{ mA}$			-0.65		mV/°C
RR	Ripple Rejection <sup>(4), (5)</sup>		f = 120 Hz, 8 V ≤ 3	$V_{I} \le 18 \text{ V}, T_{J} = 25^{\circ}\text{C}$	41	80		dB
$V_D$	Dropout Voltage		$T_J = 25^{\circ}C$			1.7		V

#### Notes:

- The maximum steady-state usable output current and input voltage are very dependent on the heat sinking and/or lead length of the package. The data above represents pulse test conditions with junction temperature as indicated at the initiation of tests.
- 3. Power dissipation  $P_D \le 0.75$  W.
- 4. These parameters, although guaranteed over the recommended operating conditions, are not 100% tested in production.
- 5. Recommend minimum load capacitance of 0.01  $\mu F$  to limit high-frequency noise.

## Typical Application(6)

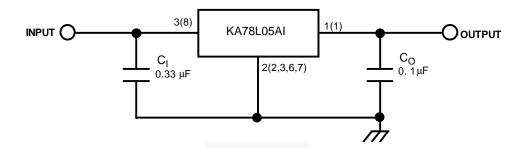


Figure 2. Typical Application

#### Note:

6.  $C_1$  is required if the regulator is located an appreciable distance from the power supply filter. Though  $C_0$  is not needed for stability, it improves transient response. Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulator.

### **Physical Dimensions**

### **SOT-89**

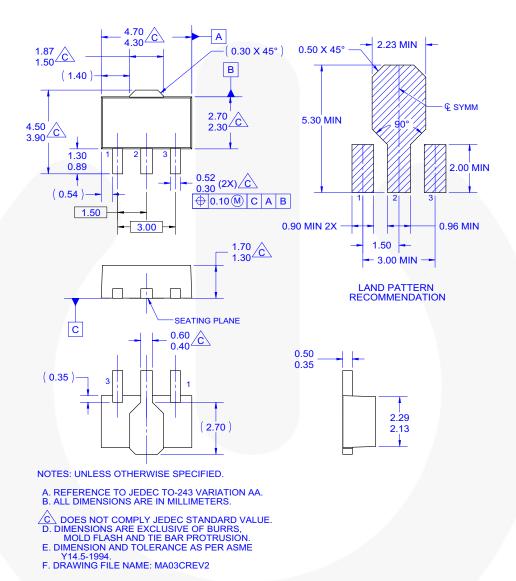


Figure 3. 3-Lead, SOT-89, JEDEC TO-243, Option AA

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings: <a href="http://www.fairchildsemi.com/packaging/">http://www.fairchildsemi.com/packaging/</a>.

For current tape and reel specifications, visit Fairchild Semiconductor's online packaging area: <a href="http://www.fairchildsemi.com/packaging/tr/sot89">http://www.fairchildsemi.com/packaging/tr/sot89</a> tr.pdf.

### Physical Dimensions (Continued)

### 8-SOIC

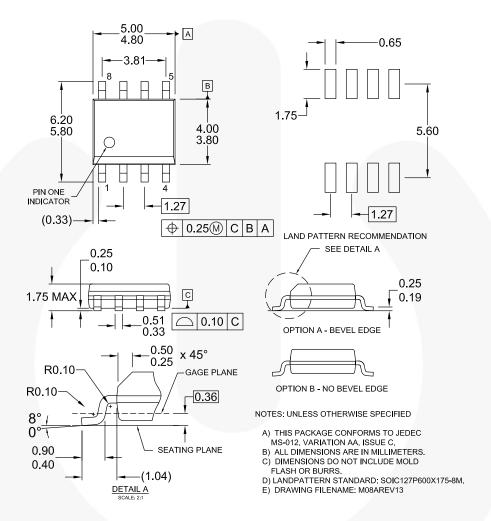


Figure 4. 8LD, SOIC, JEDEC MS-012, 0.150" NARROW BODY

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings: <a href="http://www.fairchildsemi.com/packaging/">http://www.fairchildsemi.com/packaging/</a>.

For current tape and reel specifications, visit Fairchild Semiconductor's online packaging area: <a href="http://www.fairchildsemi.com/packaging/tr/soic8">http://www.fairchildsemi.com/packaging/tr/soic8</a> tr.pdf.





#### TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

FPS™ AccuPower™ F-PFS™ AX-CAP®, **FRFET®** BitSiC™ Global Power Resource<sup>SM</sup> GreenBridge™ Build it Now™ CorePLUS™ Green FPS™ CorePOWER™ Green FPS™ e-Series™

Gmax™ CROSSVOLT™  $\mathsf{CTL}^\mathsf{TM}$ GTO™ Current Transfer Logic™ IntelliMAX™ ISOPLANAR™ **DEUXPEED®** 

Making Small Speakers Sound Louder Dual Cool™

EcoSPARK® and Better™ EfficientMax™ MegaBuck™  $\mathsf{ESBC}^{\mathsf{TM}}$ MICROCOUPLER™ ® MicroFET™ MicroPak™ Fairchild®

MicroPak2™ Fairchild Semiconductor® MillerDrive™ FACT Quiet Series™ MotionMax™ FACT' mWSaver™ FAST® OptoHiT™ FastvCore™ OPTOLOGIC® FETBench™ OPTOPLANAR® PowerTrench® PowerXS™

Programmable Active Droop™

OFET' QS™ Quiet Series™ RapidConfigure™

Saving our world, 1mW/W/kW at a time™

SignalWise™ SmartMax™ SMART START™

Solutions for Your Success™

SPM® STEAL TH™ SuperFET SuperSOT™-3 SuperSOT™-6 SuperSOT™-8 SupreMOS® SyncFET™

SYSTEM GENERAL®\*

TinyBoost™ TinyBuck™ TinyCalc™ TinyLogic<sup>®</sup> TINYOPTO™ TinyPower™ TinyPWM™ TinyWire™

TranSiC™ TriFault Detect™ TRUECURRENT®\* uSerDes™

UHC Ultra FRFET™ UniFFT™ **VCX™** VisualMax™ VoltagePlus™

#### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- 2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

#### **ANTI-COUNTERFEITING POLICY**

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.fairchildsemi.com,

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors

#### PRODUCT STATUS DEFINITIONS

Definition of Terms				
Datasheet Identification	Product Status	Definition		
Advance Information	Formative / In Design	Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.		
Preliminary	First Production	Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.		
No Identification Needed	Full Production	Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.		
Obsolete	Not In Production	Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.		

Rev. 164

<sup>\*</sup> Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor and see no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and h

### **PUBLICATION ORDERING INFORMATION**

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81–3–5817–1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative